

LP-Series


Tensioners for plastic strapping/ single-lever combination Tool



Flat tensioners	LPT 19	LPT 25*	LPT 40	LPT 50**
Seal type	Seal	Buckle	Buckle	Buckle
Tension force range	Depending on breaking strength of the strap	Depending on breaking strength of the strap	Depending on breaking strength of the strap	Depending on breaking strength of the strap
Weight	1.2 kg (2.70 lbs)	1.3 kg (2.87 lbs)	2.5 kg (5.50 lbs)	2.6 kg (5.81 lbs)
Strap				
Strap type	PP, Cord	Cord	Cord	Cord
Strap width	10–19 mm (2/5" - 3/4")	10–25 mm (3/8" - 1")	up to 40 mm (1 5/8")	up to 50 mm (2")
Strap thickness (Cord)	0.4 – 1.2 mm (.015" - .047")	0.8 – 1.2 mm (.031 - .047")	0.6 – 1.5 mm (.023" - .058")	1.2 – 2 mm (.047" - .078")

*with cut-away base plate

** also available without built-in strap cutter

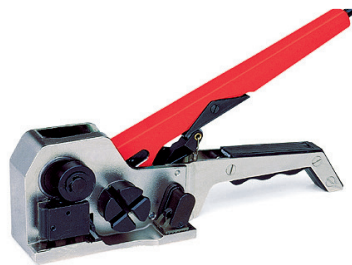

Single-lever combinatin tool	LPC 13	LPC 16
Seal type	Seal	Seal
Tension force range	Depending on breaking strength of the strap	Depending on breaking strength of the strap
Weight	2.3 kg (5 lbs)	3.4 kg (7.5 lbs)
Strap		
Strap type	PP, PET	PP, PET
Strap width	13 mm (1/2")	16 mm (5/8")
Strap thickness	0.4 – 0.7 mm (.015" - .027")	0.5 – 1.0 mm (.019 - .039")

SEALS FOR PLASTIC STRAPPING



Roughened inner side for polyester and polypropylene straps



Non-roughened, for polypropylene straps